

## SOLUTIONS FOR BUNDLING

### N3400V AUTOMATIC STRAPPING MACHINE

Introducing the N3400V arch machine – Your Ultimate Solution for Efficient Strapping! Enjoy uninterrupted performance with 45 cycles per minute, ensuring rapid and precise strapping for various applications, including boxes, lumber, and print media. The N3400V has been upgraded with a wear-free strap frame featuring stainless steel guides and an operation terminal equipped with soft buttons, making it intuitive and easy to operate. Bid farewell to manual hassles as the automatic start feature streamlines your strapping process. This innovative solution ensures not only hassle-free operation but also durability, making the N3400V the go-to choice for efficient and reliable strapping applications. Moreover, the N3400V requires less maintenance with its brushless direct drive motors, providing a cost-effective and user-friendly strapping solution.

### ENERGY SAVING MOTORS!

### The New Class for Automatic Strapping

-  All Metal Strap Drive Rollers
-  HOT Knife Sealing Technology
-  DAT (Direct Access Technology)
-  Fewer Moving Wear Parts



### FEATURES


- Up to 45 cycles per minute, depending on tension settings and package size
- Wear-free, Energy Saving 24VDC direct-drive motors
- Wear-free strap frame with stainless steel guides
- ASLF 'Anti-Strap-Loss-Function' constant strap control
- Power Switch with lockout
- Exclusive eject function avoids strap jam
- Automatic strap feed
- Strap width 5-12 mm
- Strap end detection system with automatic discharge of remaining strap
- External dispenser
- Operation terminal with soft button
- Adjustable torque controlled strap tension
- MFT 'Mono-Frame-Technology'
- Removable tabletops

# INNOVATIVE, RELIABLE, ENERGY-SAVING N3400V EQUIPMENT SPECS



## SPECIFICATIONS

<b>Cycle Rate</b>	Up to 45 cycles per minute
<b>Cycle Initiation</b>	Push Button / Foot Switch
<b>Package Weight</b>	441 lbs. (200kg)*
<b>Package Size</b>	Min. 2.17" H x .2" W (Max. Governed by Arch)
<b>Tension</b>	Max. 240lbs (325 N)
<b>Strap Size</b>	1/4" - 1/2" (5mm-12mm)
<b>Standard Arch Size</b>	576mm(W) x 567mm(H) (additional sizes available)
<b>Seal Head Location</b>	Side
<b>Sealing Method</b>	Heat Seal
<b>Mobility</b>	3" Casters
<b>Dispenser</b>	Externally Located 8" or 9" I.D./ 8" Face/ 18" O.D.
<b>Power</b>	110V Single Phase

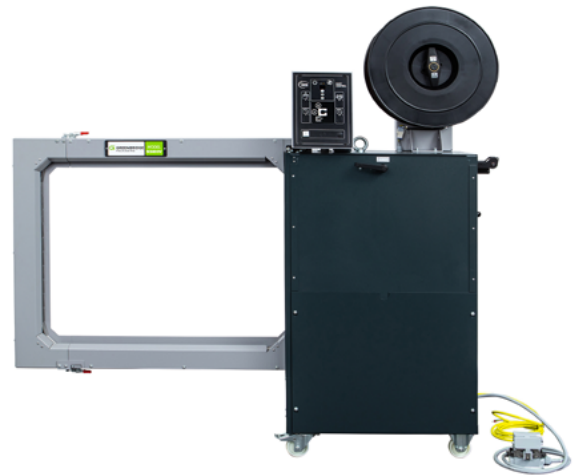

**ADDITIONAL OPTION: N3400V Large Arch  
Machine Available and Additional Arch Sizes**

## ABOUT GREENBRIDGE

Founded in 1974 as Polychem, we rebranded in April 2021 as Greenbridge to reflect our commitment to providing proactive solutions to customers across North America seeking to achieve more sustainable, high-performing operations. Our early reputation was based on our quality polyester, polypropylene and cord strapping. Today, years of growth and strategic acquisitions have made Greenbridge a leading end-of-line packaging supplier, with integrated solutions that encompass tools, equipment, systems, and services that help tame the most challenging supply chains.

*Greenbridge is committed to the safety of our team, the quality of our products and services, investing in continuous improvement, advancing the circular economy, and fostering sustainable customer success.*

**It's easy to find a supplier to sell you equipment.**

**It's another thing to find one who understands your business.**

**Talk to Greenbridge.**

**GREENBRIDGE**  
YOUR BRIDGE TO BUNDLED